




New Product Announcement

Galvanized Tubular Scaffold Ladder

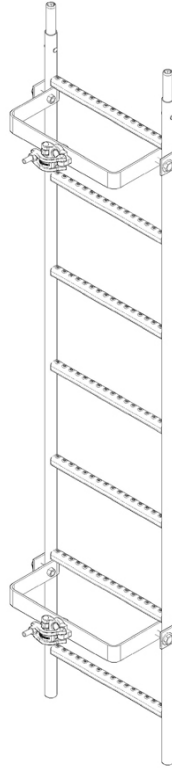

| Part No. | LTUB4 | LTUB7 | LTUBB |
|-------------|----------------|-----------------|---------------|
| Weight (kg) | 14.2 lbs (6.4) | 24.1 lbs (10.9) | 6.3 lbs (2.8) |
| Released | June 2011 | June 2011 | June 2011 |

Reach New Heights With New Tubular Ladder

Meets Federal OSHA requirements for rung width, spacing and toe clearance. The Galvanized Tubular Scaffold Ladder features tubular, perforated rungs that promote moisture drainage and efficient access. This unit is compatible with Safway's Systems™, Sectional and Tube & Clamp Scaffold; the clamps used for the unit's bracket are the same clamps used with our other scaffold product lines.


Features and Benefits

- All-steel welded construction for maximum strength, ensuring this unit withstands different weather elements and time
- Hot-dip galvanized to resist corrosion and promote long-lasting durability
- Convenience: The unit's lightweight design makes for easier assembly, disassembly and transport
- Perforated, open channel rung promotes drainage
- 7' length: To align with lift height of Systems™ Scaffold
- 4' length: For use at platform top
- Clamp to vertical legs or horizontal members



Additional Information

- Compatible: Works with our Systems™, Sectional and Tube & Clamp Scaffold
- No extra tools required: Same tool that is used for the clamp can be used for the bracket
- Available in 7' and 4' lengths
- Strength: A high load capacity of 300 pounds.
- 1 1/4" OD Tubular Rails; includes tubular coupling pin

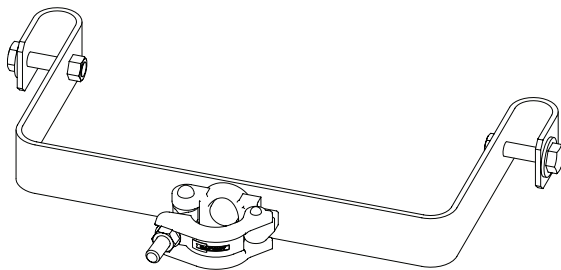

Safway Services, LLC

Corporate Headquarters
N19 W24200 Riverwood Drive
Waukesha, WI 53188
Toll free: (800) 558-4772
Telephone: (262) 523-6500

For a list of branch locations in the United States and Canada, visit our website at www.safway.com

©2011 Safway Services, LLC. All rights reserved.

